



PRODUCT FEATURES


STARTING METHOD: Rapid	INPUT VOLTAGE: 120VAC ±10%	WARRANTY: 3 Years
LAMP CONNECTION: --	INPUT FREQUENCY: 50/60 Hz	POWER FACTOR: Normal

- Sound Rated: A
- Minimum Starting Temperature: 0°F, -18°C
- Maximum Case Temperature: 167°F, 75°C
- Meets FCC Part 18 (Class B) Consumer Limits
- Transient Protection Meets ANSI/IEEE62.41 Cat. A
- Lamp end-of-life protected


ELECTRICAL SPECIFICATIONS

LAMP TYPE	NO. OF LAMPS	INPUT VOLTS	INPUT WATTS	INPUT CURRENT (AMPS)	POWER FACTOR	CREST FACTOR	BALLAST FACTOR	BALLAST EFFICACY FACTOR	MAX THD%	WIRING DIAGRAM
F32T8	1	120	31	0.45	0.58	1.49	0.88	2.84	150	F1-8
F25T8	1	120	24	0.36	0.56	1.47	0.92	3.83	150	F1-8
F17T8	1	120	19	0.29	0.53	1.52	1.05	5.53	150	F1-8
F15T8	1	120	16	0.27	0.52	1.62	1.05	6.56	150	F1-8
F40T12	1	120	28	0.40	0.58	1.46	0.78	2.78	150	F1-8
F34T12	1	120	24	0.34	0.57	1.44	0.80	3.33	150	F1-8
F30T12	1	120	22	0.33	0.55	1.43	0.80	3.64	150	F1-8

WIRING DIAGRAMS

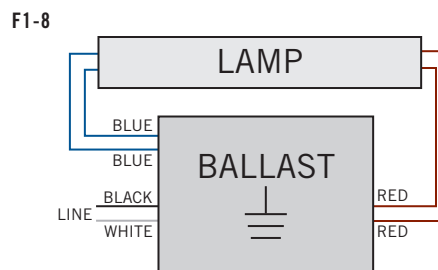

CASE STYLE/DIMENSIONS

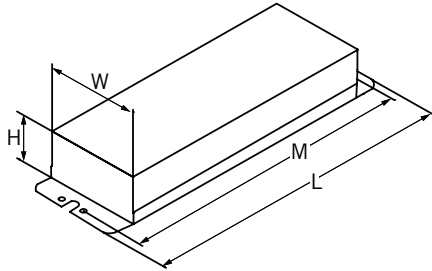

CASE DIMENSIONS


LENGTH: 6.46"
WIDTH: 1.32"
HEIGHT: 1.00"
MOUNTING: 6.00"
UNIT WEIGHT: 0.60 lbs

STANDARD LEAD LENGTHS*

BLACK: 14.00"
WHITE: 14.00"
BLUE: 25.00" X 25.00"
RED: 33.00" X 33.00"

*Consult Keystone for special lead length requirements.

HOT SPOT LOCATION

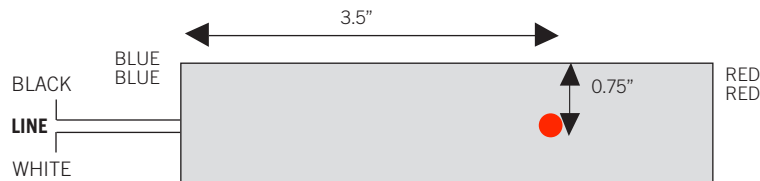

ORDERING INFORMATION

ORDER CODE	PACKAGING STYLE	PACK QTY.	ITEM STATUS
KTEB-132-1-TP-EMI-CP	Carton	20	Active
KTEB-132-1-TP-EMI-BP	Bulk	2,200	Special Order

CATALOG NUMBER BREAKDOWN

KTEB-132-1-TP-EMI

