



<b>KTEB-132LBF-UV-TP-PIC-SL</b>	
Ballast Type	Electronic
Starting Method	Instant Start
Lamp Connection	--
Input Voltage	120 ~ 277Vac ± 10%
Input Frequency	60Hz / 50Hz

**ELECTRICAL SPECIFICATIONS:**

Lamp Type	No. of Lamp	Volts	Input Watts	Input Current (Amps)	Power Factor	Crest Factor	Ballast Factor	Ballast Efficacy Factor	Max. THD %
F32T8	1	120	31	0.25	0.99	1.44	0.88	2.84	10
		277	31	0.11	0.99	1.44	0.88	2.84	10
F25T8	1	120	24	0.20	0.99	1.44	0.90	3.75	10
		277	24	0.09	0.99	1.44	0.90	3.75	10
F17T8	1	120	17	0.15	0.99	1.42	0.90	5.29	10
		277	17	0.07	0.98	1.42	0.90	5.29	10

**PERFORMANCE:**


- Sound Rated: A
- Minimum Starting Temperature: 0°F, -18°C
- Maximum Case Temperature: 167°F, 75°C
- Meets FCC Part 18 (Class B) Non Consumer Limits
- Transient Protection meets ANSI/IEEE C62.41 Cat. A
- Ballast frequency for all listed lamps: 20KHz-33KHz
- 5-Year Warranty
- OCV: 600V

**APPROVALS:**


- UL, cUL 935 listed

**PHYSICAL DIMENSIONS:**

Length (L):	9.50"
Width (W):	1.38"
Height (H):	1.18"
Mounting (M):	8.90"
Lead Length:	
White, Black	25"
Blue	31"
Red	37"

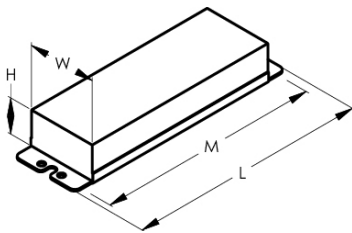

**WIRING DIAGRAM:**

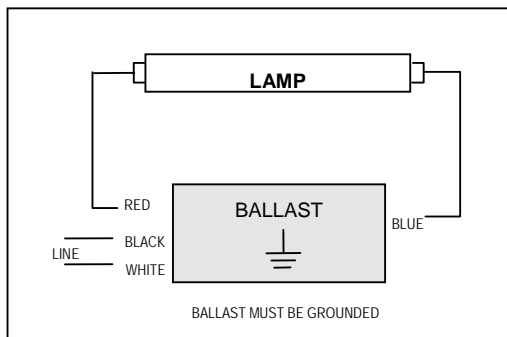

**Hot Spot Location:**

