



## PRODUCT FEATURES


<b>STARTING METHOD:</b> Rapid	<b>INPUT VOLTAGE:</b> 120VAC ±10%	<b>WARRANTY:</b> 3 Years
<b>LAMP CONNECTION:</b> --	<b>INPUT FREQUENCY:</b> 50/60 Hz	<b>POWER FACTOR:</b> Normal

- Sound Rated: A
- Minimum Starting Temperature: 0°F, -18°C
- Maximum Case Temperature: 167°F, 75°C
- Meets FCC Part 18 (Class B) Consumer Limits
- Transient Protection Meets ANSI/IEEE62.41 Cat. A
- Lamp end-of-life protected

## ELECTRICAL SPECIFICATIONS

LAMP TYPE	NO. OF LAMPS	INPUT VOLTS	INPUT WATTS	INPUT CURRENT (AMPS)	POWER FACTOR	CREST FACTOR	BALLAST FACTOR	BALLAST EFFICACY FACTOR	MAX THD%	WIRING DIAGRAM
F24T5 HO	1	120	28.0	0.41	0.55	<1.70	1.00	3.57	135	F1-6
F39T5 HO	1	120	35.0	0.49	0.57	<1.70	0.88	2.51	120	F1-6

## WIRING DIAGRAMS

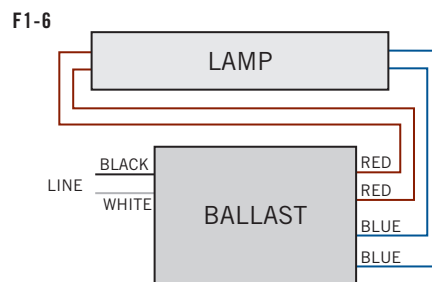




# KTEB-139H0-1-TP

T5HO ELECTRONIC FLUORESCENT

## CASE STYLE/DIMENSIONS

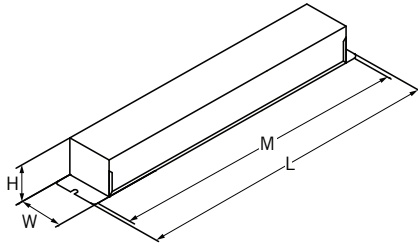

### CASE DIMENSIONS


LENGTH: 9.00"
WIDTH: 0.95"
HEIGHT: 0.95"
MOUNTING: 8.75"
UNIT WEIGHT: 0.64 lbs

### STANDARD LEAD LENGTHS\*

BLACK: 24.00"
WHITE: 24.00"
BLUE: 22.00" X 22.00"
RED: 36.00" X 36.00"

\*Consult Keystone for special lead length requirements.

## HOT SPOT LOCATION

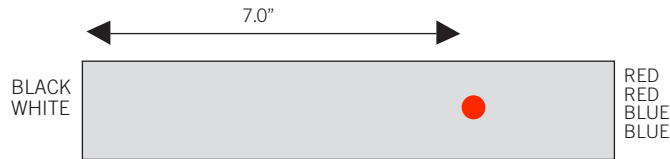

## ORDERING INFORMATION

ORDER CODE	PACKAGING STYLE	PACK QTY.	ITEM STATUS
KTEB-139H0-1-TP-CP	Carton	50	Active

## CATALOG NUMBER BREAKDOWN

# KTEB-139H0-1-TP

