



PRODUCT FEATURES



STARTING METHOD: Program	INPUT VOLTAGE: 120-277VAC ±10%	WARRANTY: 5 Years
LAMP CONNECTION: Series	INPUT FREQUENCY: 50/60 Hz	POWER FACTOR: High

- Sound Rated: A
- Minimum Starting Temperature: 0°F, -18°C
- Maximum Case Temperature: 194°F, 90°C
- Meets FCC Part 18 (Class B) Consumer Limits
- Transient Protection Meets ANSI/IEEE62.41 Cat. A
- Lamp end-of-life protected

ELECTRICAL SPECIFICATIONS

LAMP TYPE	NO. OF LAMPS	INPUT VOLTS	INPUT WATTS	INPUT CURRENT (AMPS)	POWER FACTOR	CREST FACTOR	BALLAST FACTOR	BALLAST EFFICACY FACTOR	MAX THD%	WIRING DIAGRAM
CFQ18W/G24q	2	120	35.0	0.30	0.99	1.50	0.95	2.71	10	P2-2
		277	35.0	0.13	0.99	1.50	0.95	2.71	10	P2-2
	1	120	19.0	0.16	0.97	1.50	1.00	5.26	10	P1-2
		277	19.0	0.07	0.97	1.50	1.00	5.26	10	P1-2
CFTR18W/GX24q	2	120	39.0	0.33	0.97	1.50	1.05	2.69	10	P2-2
		277	39.0	0.14	0.99	1.50	1.05	2.69	10	P2-2
	1	120	20.0	0.17	0.97	1.50	1.05	5.25	10	P1-2
		277	20.0	0.08	0.97	1.50	1.05	5.25	10	P1-2
CFQ26W/G24q	1	120	28.0	0.24	0.99	1.60	1.00	3.57	12	P1-2
		277	28.0	0.10	0.96	1.60	1.00	3.57	12	P1-2
CFTR26W/GX24q	1	120	28.0	0.24	0.99	1.60	1.00	3.57	12	P1-2
		277	28.0	0.10	0.96	1.60	1.00	3.57	12	P1-2
CFS21W/GR10q	2	120	40.0	0.33	0.99	1.50	0.91	2.28	10	P2-2
		277	40.0	0.14	0.99	1.50	0.91	2.28	10	P2-2
	1	120	20.0	0.16	0.97	1.50	0.90	4.50	15	P1-2
		277	20.0	0.07	0.97	1.50	0.90	4.50	15	P1-2
CFS16W/GR10q	2	120	37.0	0.31	0.99	1.50	1.00	2.70	10	P2-2
		277	37.0	0.13	0.99	1.50	1.00	2.70	10	P2-2
CFS16W/GR10q	1	120	31.0	0.26	0.99	1.50	1.00	3.23	10	P1-2
		277	31.0	0.11	0.97	1.50	1.00	3.23	10	P1-2

WIRING DIAGRAMS

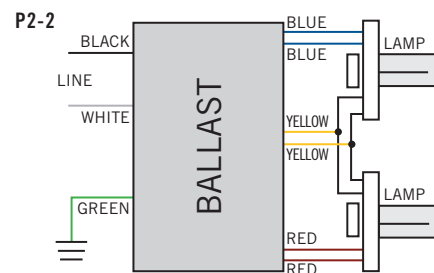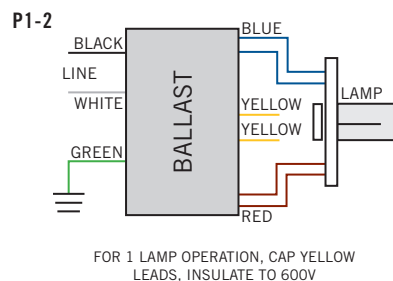




KTEB-218-UV-TP-PSD

CFL ELECTRONIC COMPACT FLUORESCENT

CASE STYLE/DIMENSIONS

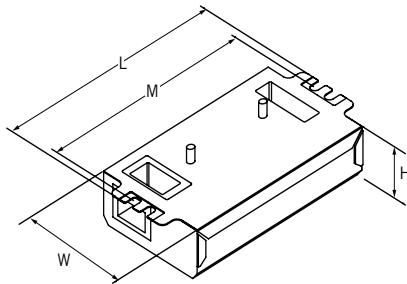


CASE DIMENSIONS

LENGTH: 5.00"
WIDTH: 2.40"
HEIGHT: 1.00"
MOUNTING: 4.63"
UNIT WEIGHT: 0.53 lbs

Ballast utilizes side and bottom terminal connectors. Standard product ships without wires. Consult factory if integral leads are required.

HOT SPOT LOCATION

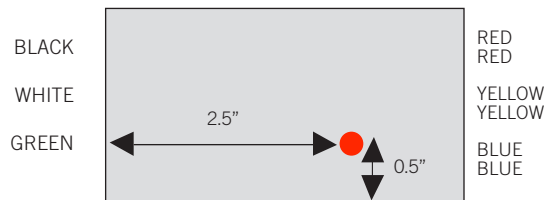

ORDERING INFORMATION

ORDER CODE	PACKAGING STYLE	PACK QTY.	ITEM STATUS
KTEB-218-UV-TP-PSD-CP	Carton	20	Quick Ship

CATALOG NUMBER BREAKDOWN

KTEB-218-UV-TP-PSD

