



KTEB-224HO-UV-TP-PS	
Ballast Type	Electronic
Starting Method	Programmed Start
Lamp Connection	Series
Input Voltage	120-277Vac ± 10%
Input Frequency	50 / 60Hz

ELECTRICAL SPECIFICATIONS:

Lamp Type	No. of Lamp	Volts	Input Watts	Input Current (Amps)	Power Factor	Max. Crest Factor	Ballast Factor	Ballast Efficacy Factor	Max. THD %
F24T5/HO	2	120	52	0.44	0.98	1.7	1.00	1.92	10
		277	52	0.19	0.98	1.7	1.00	1.92	10
	1	120	27	0.23	0.98	1.7	1.02	3.78	10
		277	27	0.10	0.98	1.7	1.02	3.78	10
FT24W/2G11	2	120	52	0.44	0.98	1.7	1.00	1.92	10
		277	52	0.19	0.98	1.7	1.00	1.92	10
		120	27	0.23	0.98	1.7	1.02	3.78	10
	1	277	27	0.10	0.98	1.7	1.02	3.78	10
		120	52	0.44	0.98	1.7	1.00	1.92	10
		277	52	0.19	0.98	1.7	1.00	1.92	10
FC9T5 22W	2	120	27	0.23	0.98	1.7	1.02	3.78	10
		277	27	0.10	0.98	1.7	1.02	3.78	10
	1	120	40	0.34	0.98	1.7	0.84	2.10	10
FC12T5 40W	1	277	40	0.15	0.98	1.7	0.84	2.10	10
		120	47	0.40	0.98	1.7	1.00	2.13	10
FT40W/2G11	1	277	47	0.17	0.98	1.7	1.00	2.13	10
		120	34	0.29	0.98	1.7	0.90	2.65	10
FT36W/2G11	1	277	34	0.13	0.98	1.7	0.90	2.65	10
		120	39	0.33	0.99	1.7	0.90	2.31	10
F39T5/HO	1	277	39	0.15	0.97	1.7	0.90	2.31	10


PERFORMANCE:

- Sound Rated: A
- Minimum Starting Temperature: 0°F, -18°C
- Maximum Case Temperature: 194°F, 90°C
- Meets FCC Part 18 (Class A) Consumer Limits
- 5-Year Warranty
- UL, cUL 935 Listed
- Transient Protection meets ANSI/IEEE C62.41 Cat. A
- Lamp end-of-life protected


PHYSICAL DIMENSIONS:

Length (L):	16.7"	
Width (W):	1.18"	
Height (H):	1.00"	
Mounting (M):	16.4"	

WIRING DIAGRAM:

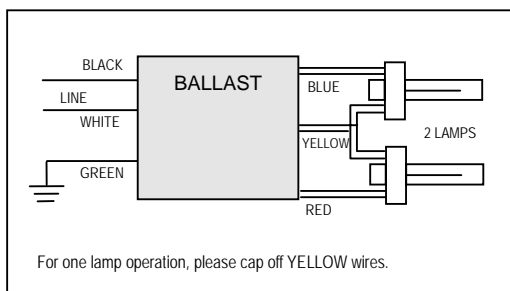

Hot Spot Location:

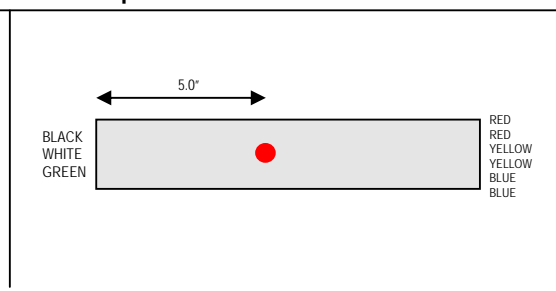

KEYSTONE TECHNOLOGIES LLC.
 P.O. Box 246, AMBLER, PENNSYLVANIA 19002
 PHONE: 215-283-2600
 FAX: 215-628-4412
 INFO@KEYSTONEBALLAST.COM
 WWW.KEYSTONEBALLAST.COM