



KTEB-226-UV-TP-PSD	
Ballast Type	Electronic
Starting Method	Programmed Start
Lamp Connection	Series
Input Voltage	120 ~ 277Vac ± 10%
Input Frequency	50 / 60Hz

ELECTRICAL SPECIFICATIONS:

Lamp Type	No. of Lamp	Volts	Input Watts	Input Current (Amps)	Power Factor	Crest Factor	Ballast Factor	Ballast Efficacy Factor	Max. THD %
CFQ26WG24q	2	120	51	0.43	0.99	1.5	1.00	1.96	10
		277	51	0.19	0.99	1.5	1.00	1.96	10
	1	120	27	0.23	0.98	1.5	1.00	3.70	10
		277	27	0.10	0.98	1.5	1.00	3.70	10
CFTR26W/GX24q	2	120	54	0.45	0.99	1.5	1.00	1.85	10
		277	54	0.20	0.99	1.5	1.00	1.85	10
	1	120	29	0.24	0.98	1.5	1.10	3.79	10
		277	29	0.11	0.98	1.5	1.10	3.79	10
CFTR42W/GX24q	1	120	46	0.38	0.98	1.5	0.98	2.13	10
		277	46	0.17	0.98	1.5	0.98	2.13	10
CFTR32W/GX24q	1	120	36	0.31	0.98	1.5	0.98	2.72	10
		277	36	0.13	0.98	1.5	0.98	2.72	10
CFS21W/GR10q	2	120	51	0.42	0.99	1.5	1.12	2.20	10
		277	51	0.18	0.99	1.5	1.12	2.20	10
FT24W/2G11	2	120	48	0.41	0.99	1.5	0.93	1.94	10
		277	48	0.18	0.99	1.5	0.93	1.94	10
F24T5 HO	2	120	51	0.44	0.99	1.5	1.0	1.96	10
		277	51	0.19	0.98	1.5	1.0	1.96	10
FC16T9 40W	1	120	43	0.36	0.99	1.5	1.0	2.33	10
		277	43	0.16	0.97	1.5	1.0	2.33	10



PERFORMANCE:

- Sound Rated: A
- Minimum Starting Temperature: 0°F, -18°C
- Maximum Case Temperature: 194°F, 90°C
- Meets FCC Part 18 (Class B) Consumer Limits
- 5-Year Warranty
- UL, cUL 935 Listed
- Transient Protection meets ANSI/IEEE C62.41 Cat. A
- Lamp end-of-life protected


PHYSICAL DIMENSIONS:

<p>Length (L): 5.00" Width (W): 2.40" Height (H): 1.00" Mounting(M): 4.63"</p> <p>Options: also available versions</p> <ul style="list-style-type: none"> - without studs - with lead wires 	
--	--

WIRING DIAGRAM:

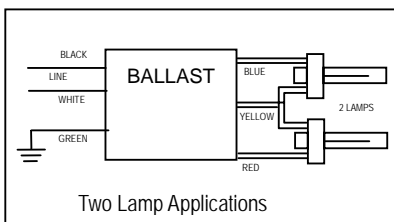

HOT SPOT LOCATION:



KEYSTONE TECHNOLOGIES LLC.
P.O. Box 246, AMBLER, PENNSYLVANIA 19002
PHONE: 215-283-2600
FAX: 215-628-4412
INFO@KEYSTONEBALLAST.COM
WWW.KEYSTONEBALLAST.COM