



KTEB-232LBF-1-TP-PIC-SL	
Ballast Type	Electronic
Starting Method	Instant Start
Lamp Connection	Parallel
Input Voltage	120Vac ± 10%
Input Frequency	60Hz / 50Hz

ELECTRICAL SPECIFICATIONS:

Lamp Type	No. of Lamp	Input Watts	Input Current (Amps)	Power Factor	Crest Factor	Ballast Factor	Ballast Efficacy Factor	Max. THD %
F40T8	1	44	0.16	0.99	1.52	1.00	2.27	10
F32T8	2	60	0.50	0.99	1.57	0.88	1.47	10
	1	38	0.32	0.99	1.55	1.15	3.03	10
F25T8	2	47	0.39	0.99	1.61	0.90	1.91	10
	1	31	0.26	0.99	1.52	1.15	3.71	10
F17T8	2	33	0.28	0.99	1.56	0.90	2.73	10
	1	22	0.19	0.98	1.52	1.20	5.45	10

PERFORMANCE:

- Sound Rated: A
- Minimum Starting Temperature: 0°F, -18°C
- Maximum Case Temperature: 167°F, 75°C
- Meets FCC Part 18 (Class B) Consumer Limits
- Transient Protection meets ANSI/IEEE C62.41 Cat. A
- Ballast frequency for all listed lamps: 20KHz-33KHz
- 5-Year Warranty
- OCV: 600V


APPROVALS:

- UL, cUL 935 listed

PHYSICAL DIMENSIONS:

<p>Length (L): 9.50" Width (W): 1.38" Height (H): 1.18" Mounting(M): 8.90"</p>	
--	--

WIRING DIAGRAM:

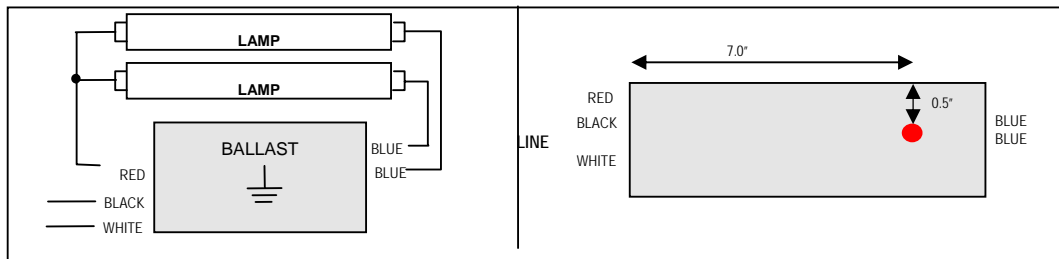

Two Lamps Application
(Cap off 1 Blue Lead for 1 lamp application)

KEYSTONE TECHNOLOGIES LLC.
P.O. Box 246, AMBLER, PENNSYLVANIA 19002
PHONE: 215-283-2600
FAX: 215-628-4412
INFO@KEYSTONEBALLAST.COM
WWW.KEYSTONEBALLAST.COM